


HAT REAKTÖRLERİ / LINE REACTORS

Z%2


Trifaze Hat Reaktörü Teknik Değerleri / Line Reactor Technical Specifications
Z%2 : Un: 400 V AC fn : 50Hz (60 Hz upon request)

Ürün Kodu Product Code	Güç (kW) Power	Akım (A) Current	Ln (mH)	In (A)	I rms (A)	I th (A)	I lin (A)	Kayıp Loss (W)
OM-TLR-Z2-540010	5	10	1,470	9,6	10	12,0	17	23,9
OM-TLR-Z2-7,540016	7,5	16	0,918	15,4	16	19,1	27	33,1
OM-TLR-Z2-1140024	11	24	0,612	23,1	24	28,8	40,7	56,4
OM-TLR-Z2-1540030	15	30	0,491	28,9	30	36,0	50,9	57,8
OM-TLR-Z2-1740035	17	35	0,420	33,8	35	42	59,4	79,5
OM-TLR-Z2-18,540037	18,5	37	0,397	35,7	37	44,3	62,7	61,5
OM-TLR-Z2-2240050	22	50	0,294	48,2	50	60,0	84,9	51,7
OM-TLR-Z2-3740075	37	75	0,196	72,3	75	89,8	127	73,3
OM-TLR-Z2-4540090	45	90	0,163	86,8	90	107,5	152	83,8
OM-TLR-Z2-55400110	55	110	0,133	106	110	132,2	187	122,7
OM-TLR-Z2-75400150	75	150	0,098	145	150	179,6	254	101,3
OM-TLR-Z2-80400160	80	160	0,091	155	160	192,3	272	140,5
OM-TLR-Z2-90400180	90	180	0,081	174	180	215,7	305	109,0
OM-TLR-Z2-100400200	100	200	0,073	192	200	240,4	340	111,5
OM-TLR-Z2-110400220	110	220	0,066	213	221	264,5	374	153,4
OM-TLR-Z2-125400250	125	250	0,058	242	250	300,5	425	132,1
OM-TLR-Z2-132400300	132	300	0,049	290	300	359,9	509	177,4
OM-TLR-Z2-160400350	160	350	0,049	338	350	420,0	594	192,7
OM-TLR-Z2-200400400	200	400	0,036	386	400	480,1	679	196,3
OM-TLR-Z2-250400500	250	500	0,029	483	500	601,0	850	272,2
OM-TLR-Z2-315400630	315	630	0,023	608	630	756,6	1070	264,5
OM-TLR-Z2-355400710	355	710	0,021	685	710	756,6	1070	491,3
OM-TLR-Z2-400400800	400	800	0,018	772	800	960,3	1358	306,6
OM-TLR-Z2-5004001000	500	1000	0,015	965	1000	1200	1698	366,9
OM-TLR-Z2-6004001200	600	1200	0,012	1158	1200	1440	2037	479,1

HAT REAKTÖRLERİ / LINE REACTORS

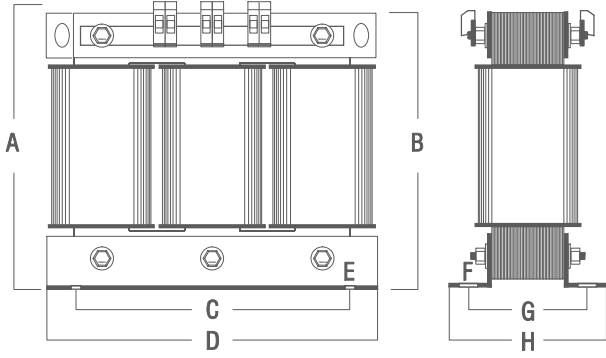

ELEKTRİKSEL BAĞLANTI SIRA / RAY KLEMENS
ELECTRICAL CONNECTION ROW / RAIL TERMINAL

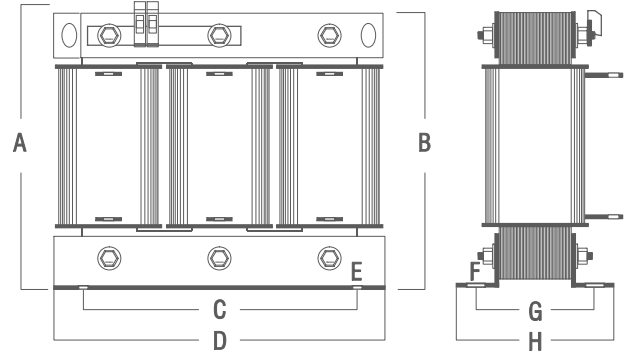

ELEKTRİKSEL BAĞLANTI BARA
ELECTRICAL CONNECTION BUSBAR

Z%2

Trifaze Hat Reaktörü Ölçüleri / Line Reactor Dimension
Z%2 : Un: 400 V AC fn : 50Hz (60 Hz upon request)

Ürün Kodu Product Code	Güç (kW) Power	Akım (A) Current	A	B	C	D	E	F	G	H	Ağırlık (kg) Weight
OM-TLR-Z2-540010	5	10	125	100	74	120	6	10	43,5	57,5	1,33
OM-TLR-Z2-7,540016	7,5	16	170	100	74	120	6	10	43,7	57,7	1,34
OM-TLR-Z2-1140024	11	24	195	125	80	150	6	10	49	63	2,6
OM-TLR-Z2-1540030	15	30	195	125	80	150	6	10	49	63	2,6
OM-TLR-Z2-1740035	17	35	195	125	80	150	6	10	64	78	4,0
OM-TLR-18,540037	18,5	37	195	125	80	150	6	10	64	78	4,0
OM-TLR-2240050	22	50	150	150	90	180	7	12	58,5	74,5	5,4
OM-TLR-3740075	37	75	150	150	90	180	7	12	68,4	84,4	6,8
OM-TLR-Z2-4540090	45	90	200	200	120	240	7	12	67,8	83,8	11,7
OM-TLR-Z2-55400110	55	110	200	200	120	240	7	12	67,8	83,8	11,7
OM-TLR-Z2-75400150	75	150	200	200	120	240	7	12	87,8	103,8	16,6
OM-TLR-Z2-80400160	80	160	200	200	120	240	7	12	87,8	103,8	16,6
OM-TLR-Z2-90400180	90	180	200	200	120	240	7	12	87,8	103,8	16,6
OM-TLR-Z2-100400200	100	200	250	250	160	300	9	17	98	128	28,5
OM-TLR-Z2-110400220	110	220	250	250	160	300	9	17	93	123	26,6
OM-TLR-Z2-125400250	125	250	250	250	160	300	9	17	98	128	28,5
OM-TLR-Z2-132400300	132	300	250	250	160	300	9	17	98	128	28,5
OM-TLR-Z2-160400350	160	350	250	250	160	300	9	17	110	140	33,1
OM-TLR-Z2-200400400	200	400	250	250	160	300	9	17	114	144	34,6
OM-TLR-Z2-250400500	250	500	300	300	200	360	9	17	102	126	38,3
OM-TLR-Z2-315400630	315	630	300	300	200	360	9	17	141,6	165,6	60,0
OM-TLR-Z2-355400710	355	710	350	350	240	420	13	20	122	146	58,0
OM-TLR-Z2-400400800	400	800	350	350	240	420	13	20	122	146	59,0
OM-TLR-Z2-5004001000	500	1000	350	350	240	420	13	20	132	156	61,0
OM-TLR-Z2-6004001200	600	1200	400	400	280	460	13	20	136	166	88,0